


Analog Camera

KPC-CN6300xU


- 1/3.2" 1.3M SONY STARVIS CMOS
- Horizontal 800TV Lines
- CVBS(1.0Vp-p Composite 75Ω)
- C/CS Mount for lens
- WDR, 2DNR
- Mechanical Day&Night
- Box Camera

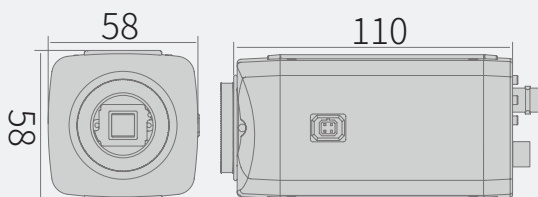

Analog Camera

KPC-CN6300xU

Dimensions

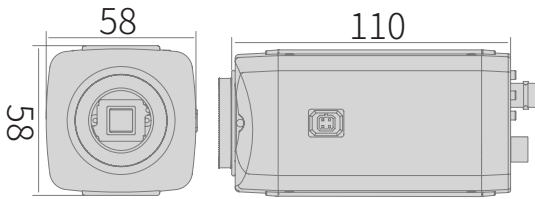

Specifications

Image Sensor	1/3.2" Exmor RS Progressive Scan SONY STARVIS CMOS
Effective Pixels	1.27MP 1297(H) x 977(V)
Max. Video Resolution	Horizontal 800TV Lines
Lens	C/CS Mount lens
FOV	Depend on lens
F-Stop	Depend on lens
Min.Illumination	0.2 Lux (30IRE, F2.0, AGC MAX)
Gamma	$\gamma=0.45$
IR LEDs	-
IR Range	-
White Balance	ATW / PUSH / USER1 / USER2 / MANUAL / PUSH LOCK
WDR	WDR / ATR / OFF
BLC	OFF / HLC / BLC
Level	138.1dB
Electronic Shutter Speed	AUTO or 1/60(50)~1/100,000
Digital Slow shutter(DSS)	-
Auto Gain Control(AGC)	MIN, 6, 12, 18, 24, 30, 36, 42, 48, MAX
Day&Night	AUTO/MANUAL (Mechanical ICR True D&N)
Noise Deduction	2D-DNR (Y/C, Y, C, OFF)
Motion Detection	-

Privacy Mask	-
Image Rotation	OFF, H-FLIP, V-FLIP, HV-FLIP
Defog	OFF, AUTO
Sharpness	0-255
OSD control	Rear OSD button
Language	English, Spanish, Portuguese, German, Russian, French
Video Output Mode	CVBS(1.0Vp-p Composite 75Ω) NTSC/PAL
General	
IP Rating	-
Operating Temperature	-10°C~+50°C(Humidity less than 80%)
Storage Temperature	-20°C~+60°C(Humidity less than 80%)
Dimension(mm)	58mmX58mmX110.4mm
Weight	Approx.230g
Power Source	12VDC(±10%)
Power Consumption	12VDC(±10%), 130mA max.
Option	
Power Source	DUAL POWER(24VAC/12VDC)
Power Consumption	24VAC(±10%), Max.2.9W 12VDC(±10%), Max.180mA
Lens	C/CS Mount Lens